
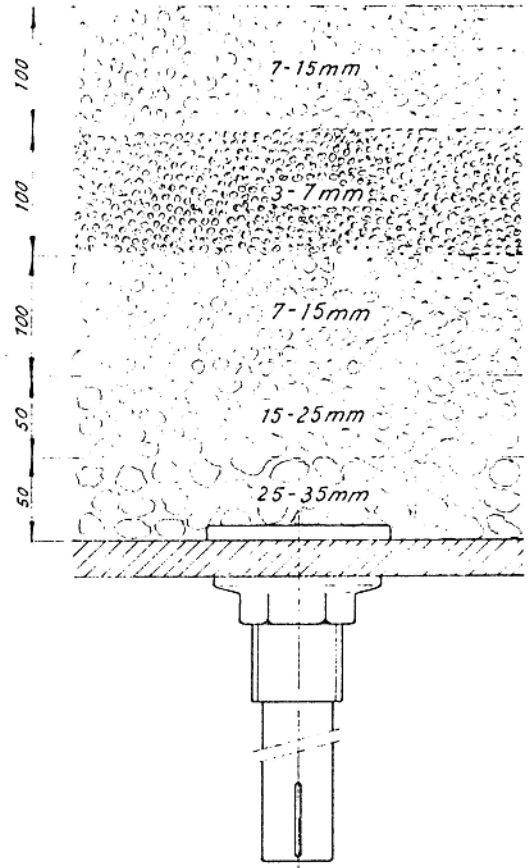


Filter-nozzles for the first stage (are resistant to contamination and can be cleaned without dismantling from the bottom).

TYPE F1

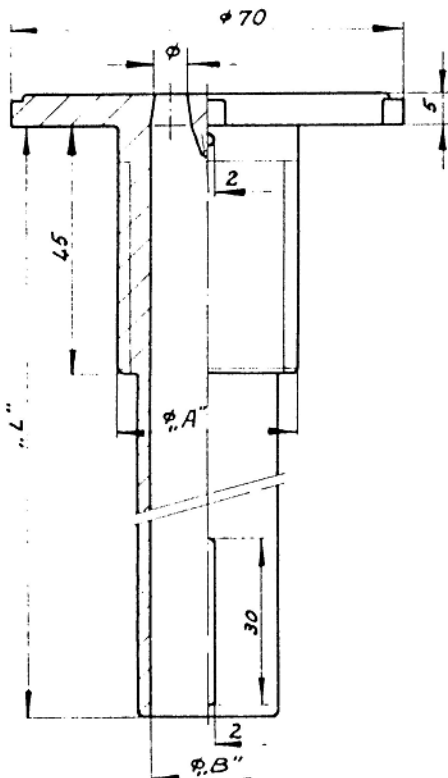

$\phi 4 \times$	$\phi 5,2 \text{ mm}$ = 85 mm ²	$\phi 7,5 \text{ mm}$ = 176,7 mm ²
Thread :	M 24	1 1/4" WW
A ϕ mm	24	32
B ϕ mm	16	21
Shaft (L)	45, 80, 110, 140, 200, 220, 250 mm or on request	